

1003 SCALE: 1/4" = 1'-0"

ELEVATION NOTES


5. PROVIDE FLASHING AT ROOF PENETRATIONS PER IRC R903.2 & R903.2.1. MASONRY & WOOD FRAME CHIMNEYS ARE TO BE CONSTRUCTED PER IRC CHAPTER 10.
CAULK OR WEATHERSTRIP ALL JOINTS AND PENETRATIONS TO HEATING SPACES. 1. VERIFY SHEAR WALL NAILING & HOLDOWNS PER PLAN & SCHEDULE PRIOR TO INSTALLING SIDING. 4. PROVIDE APPROVED CORROSION RESISTANT FLASHING AT EXTERIOR WALL ENVELOPE PER IRC R703.8

6. PROVIDE WEATHERSTRIPPING AT ALL EXTERIOR & GARAGE-INTERIOR DOORS.


PROVIDE CONTINUOUS GUTTERS & DOWNSPOUTS @ ALL EAVES, TYP.
ALL GLAZING TO COMPLY WITH WSEC 2009.
PROVIDE ROOF VENTILATION OF 1/150
OPENING SHALL BE COVERED WITH 1/4" MESH CORROSION RESISTANT WIRE.

11. PROVIDE ADDRESS ON FRONT SIDE. ADDRESS SHALL BE LEGIBLE AND VISIBLE FROM THE STREET. NUMBERS SHALL CONTRAST FROM ITS BACKGROUND.

12. ROOF TRUSS DESIGN BY TRUSS MFR



SCALE: 1/4" ELEVATION = 1'-0"

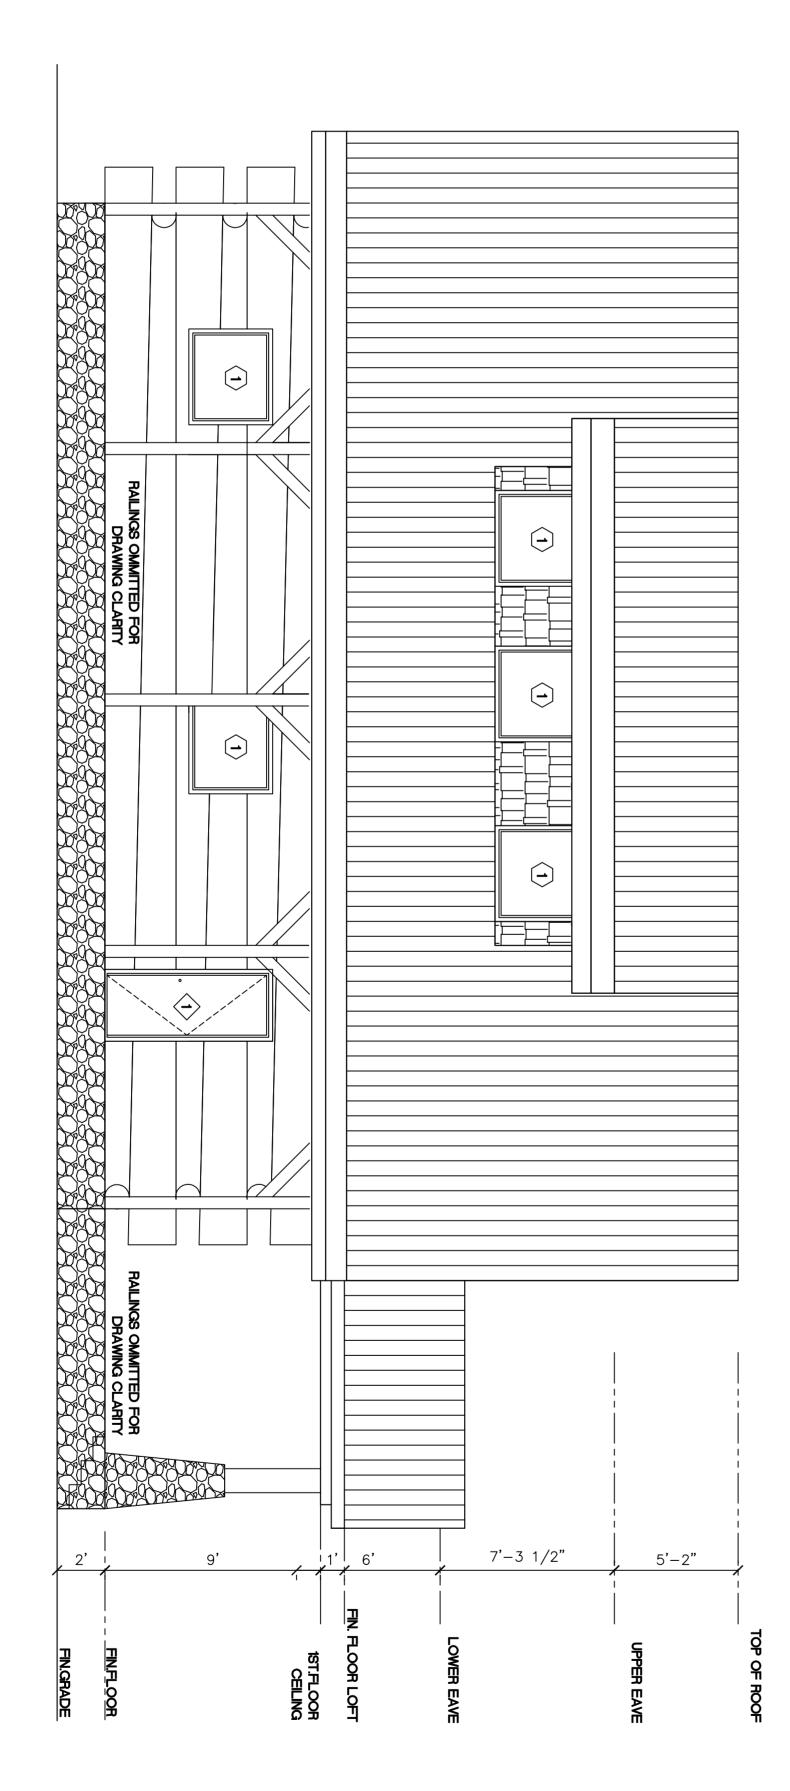

10 shee	CHRIS AND RITA SPENCER	WILEY LOG HOMES
03	35x42 LOG HOME PLAN	

Copyright © 2015 by WLH. All rights reserved.

ELEVATIONS 1/4