


3
RIGHT ELEVATION
SCALE: 1/4" = 1'-0"
1004

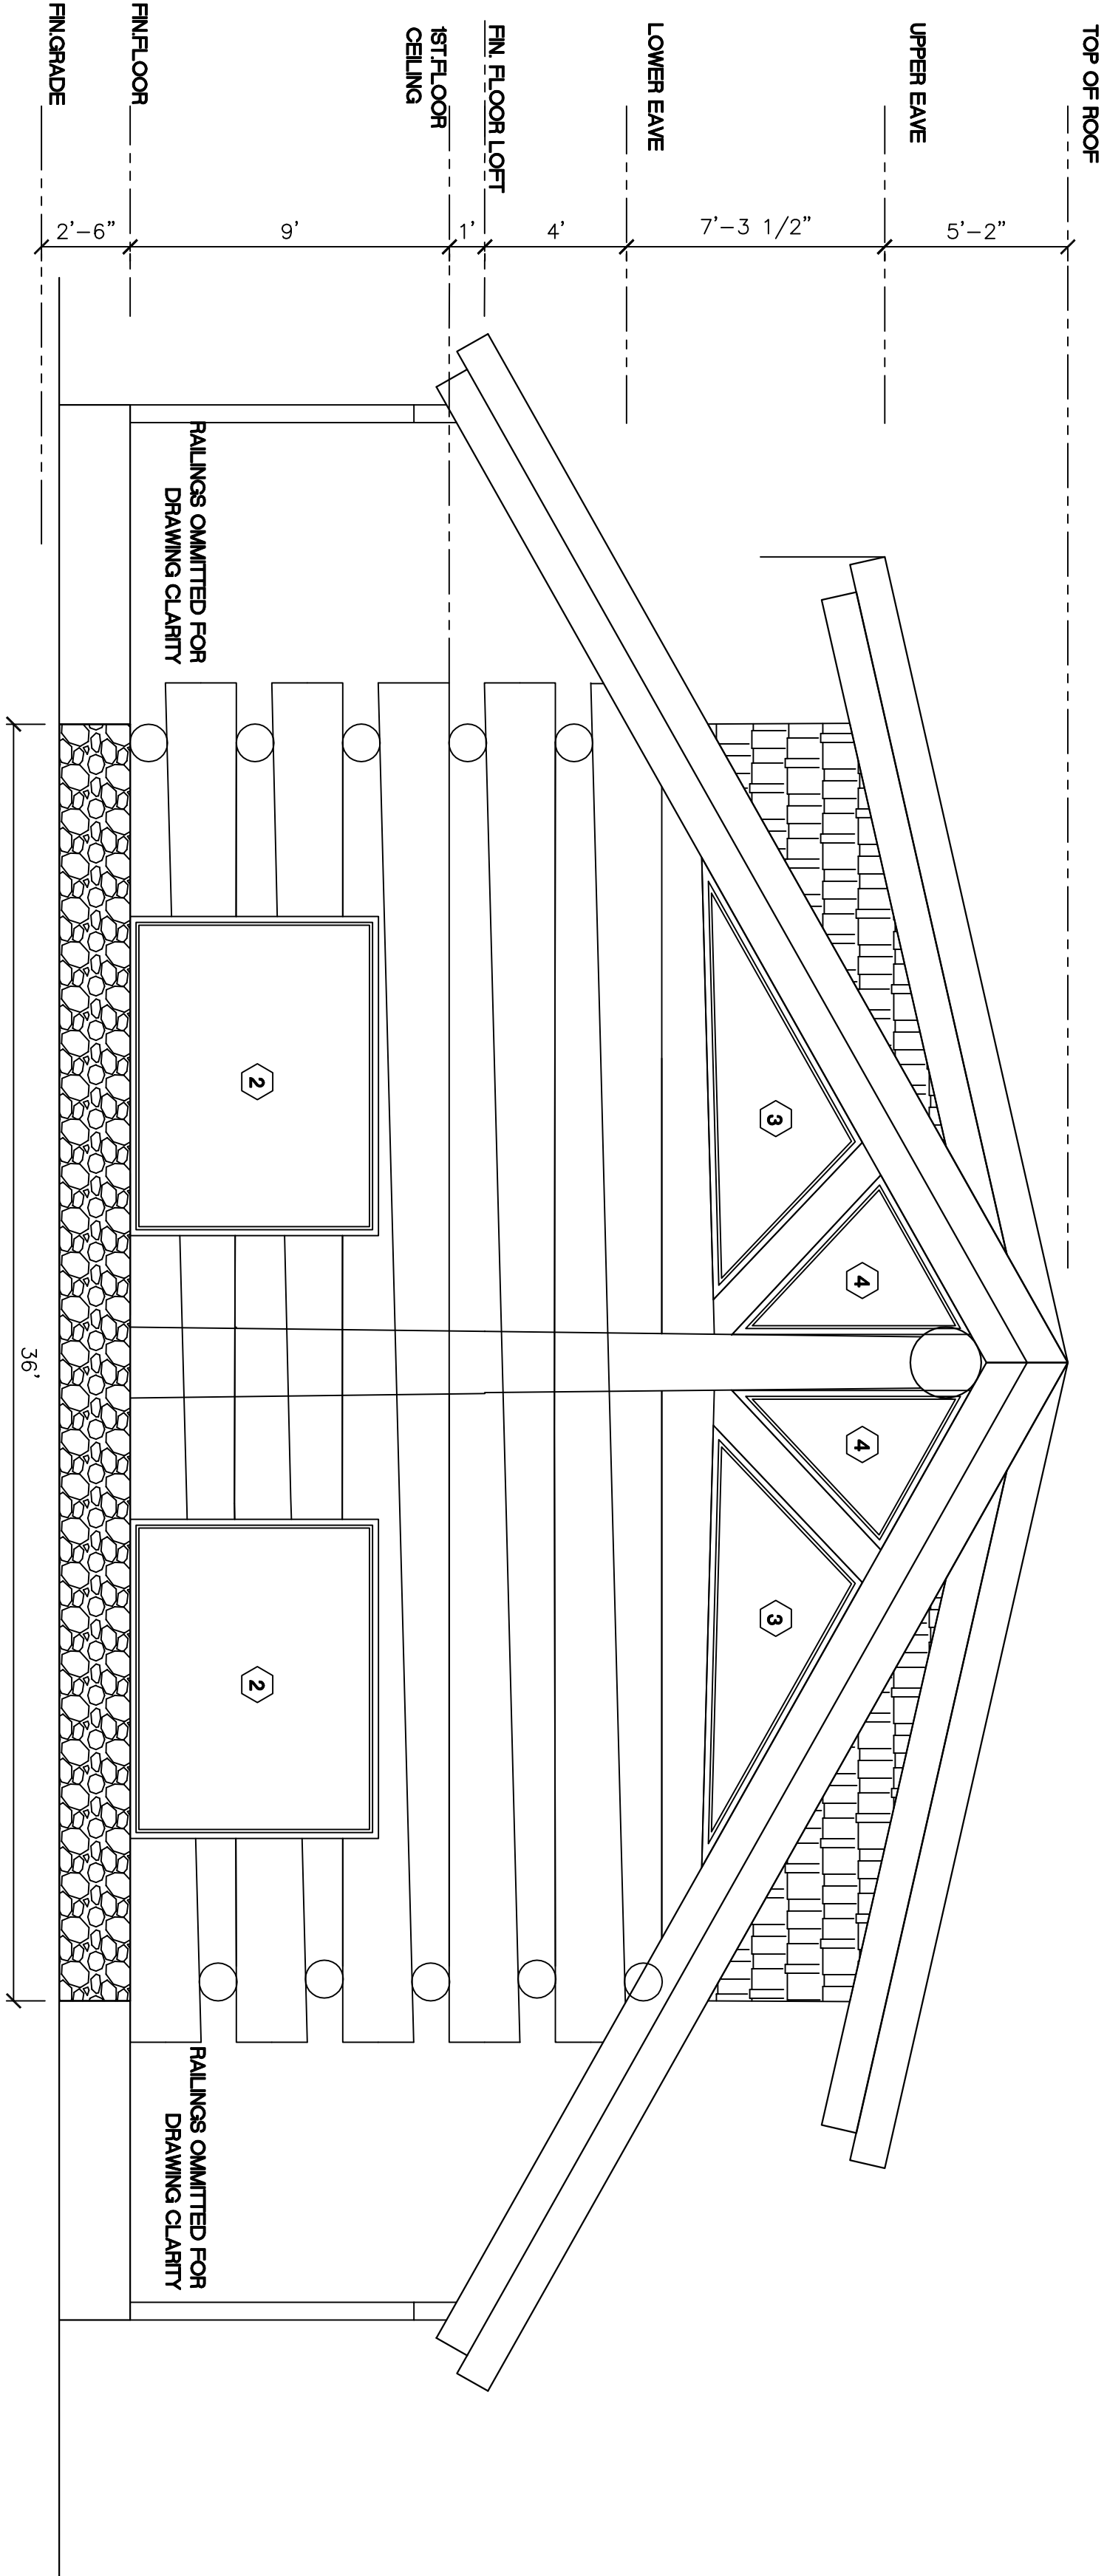

2
REAR ELEVATION
SCALE: 1/4" = 1'-0"
1004

ELEVATION NOTES

1. VERIFY SHEAR WALL NAILING & HOLD-DOWNS PER PLAN & SCHEDULE PRIOR TO INSTALLING SOING.
2. MASONRY & WOOD FRAME CHIMNEYS ARE TO BE CONSTRUCTED PER IRC CHAPTER 10.
3. CAULK OR WEATHERSTRIP ALL JOINTS AND PENETRATIONS TO HEATING SPACES.
4. PROVIDE APPROVED CORROSION RESISTANT FLASHING AT EXTERIOR WALL ENVELOPE PER IRC R703.8
5. PROVIDE FLASHING AT ROOF PENETRATIONS PER IRC R903.2 & R903.2.1.
6. PROVIDE WEATHERSTRIPPING AT ALL EXTERIOR & GARAGE-INTERIOR DOORS.
7. PROVIDE CONTINUOUS DUTTERS & DOWNSPOUTS @ ALL EAVES, TYP.
8. ALL CLADDING TO COMPLY WITH WESC 2009.
9. PROVIDE ROOF VENTILATION OF 1/150
10. OPENING SHALL BE COVERED WITH 1/4" MESH CORROSION RESISTANT WIRE.
11. PROVIDE ADDRESS ON FRONT SIDE. ADDRESS SHALL BE LEGIBLE AND VISIBLE FROM THE STREET. NUMBERS SHALL CONTRAST FROM ITS BACKGROUND.
12. ROOF TRUSS DESIGN BY TRUSS WFR